


Bottom Repairable - Medium Pressure 210 Bar

AC SERIES

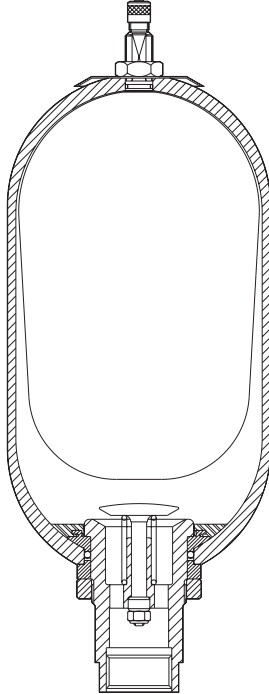

- Fully repairable industrial bladder accumulator
- Design, control & manufacture in accordance with AS.1210-1FH and BS.7201-1989
- Internal epoxy low friction shell lining on all water service accumulators. Optional halar lining available for chemical service applications (up to 20 litre)
- High pressure 1/4"BSPP coreless gas valve supplied standard.(Other connections available upon request)
- Standard nitrile rubber high strength bladder with optional stainless steel stem available upon request

OIL SERVICE

part number	gas vol. (litres)	pressure rating (bar)	connection	length/diam. (mm)
			00 (NBR 25) 3S (HNBR 30)	
** ↓ AC10**A-00-21A	9.4	210	BSP 2"	570,Ø228
AC20**A-00-21A	18.8	210	BSP 2"	886,Ø228
AC25**A-00-21A	24.5	210	BSP 2"	1158,Ø228
AC37**A-00-21A	35.2	210	BSP 2"	1425,Ø228
AC50**A-00-21A	49.2	210	BSP 2"	1930,Ø228
1½" SAE			split flange code 62	

WATER SERVICE

part number	gas vol. (litres)	pressure rating (bar)	connection	length/diam. (mm)
			00 (NBR25) 3S (HNBR30) AS (EPDM) 6S(FPM)	
** ↓ AC10**A-02-21A	9.4	210	BSP 2"	570,Ø228
AC20**A-02-21A	18.8	210	BSP 2"	886,Ø228
AC25**A-02-21A	24.5	210	BSP 2"	1158,Ø228
AC37**A-02-21A	35.2	210	BSP 2"	1425,Ø228
AC50**A-02-21A	49.2	210	BSP 2"	1930,Ø228