


Top Repairable - High Pressure 345 Bar

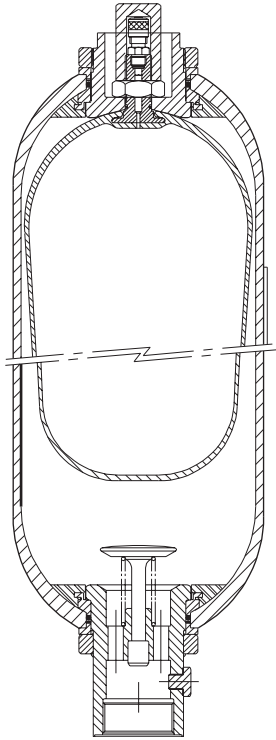

NG SERIES

- Fully top and bottom repairable bladder accumulator
- Hi-flow fluid port with standard 2"BSPP connection supplied on all oil service accumulators. Code 62 SAE 1 1/2 and code 61 SAE 2" fluid ports available upon request
- Design, control and manufacture in accordance with AS 1210-1FH
- High pressure coreless gas valve as standard 1/4"BSPP (other connections available upon request)
- Standard nitrile rubber high strength bladder with optional stainless steel stem available upon request
- Water service units are fitted with stainless steel fluid port and top plug and are using an internally lined shell.

OIL SERVICE

part number	gas vol. (litres)	pressure rating (bar)	connection	length/diam. (mm)
**			00 (NBR25) 3S (HNBR 30)	
NG10**A-00-34A	9.4	345	BSP2"	579,Ø228
NG20**A-00-34A	18.8	345	BSP2"	890, Ø228
NG37**A-00-34A	35.2	345	BSP2"	1411,Ø228
NG50**A-00-34A	49.2	345	BSP2"	1909, Ø228
NG57**A-00-34A	52.2	345	BSP2"	2001,Ø228
1 1/2" SAE			split flange code 62	

WATER SERVICE

part number	gas vol. (litres)	pressure rating (bar)	connection	length/diam. (mm)
**			00 (NBR25) 3S (HNBR 30) AS (EPDM) 6S (FPM)	
NG10**A-02-34A	9.4	345	BSP2"	579,Ø228
NG20**A-02-34A	18.8	345	BSP2"	890, Ø228
NG37**A-02-34A	35.2	345	BSP2"	1411,Ø228
NG50**A-02-34A	49.2	345	BSP2"	1909, Ø228