





ACCUMULATOR

High Pressure - 345 Bar, Top Repairable

FULL COMPLIANCE WITH AUSTRALIAN STANDARD

NG SERIES

- Heavy Duty Range
- Repairable in situ
- Improved corrosion protection for fluid port and protective cap
- Integrated gas valve
- Standard 1176 l/m high flow fluid port
- Connection without thread for SAE unit
- Fitted with high tech nitrile bladder for low permeation

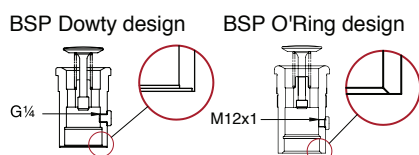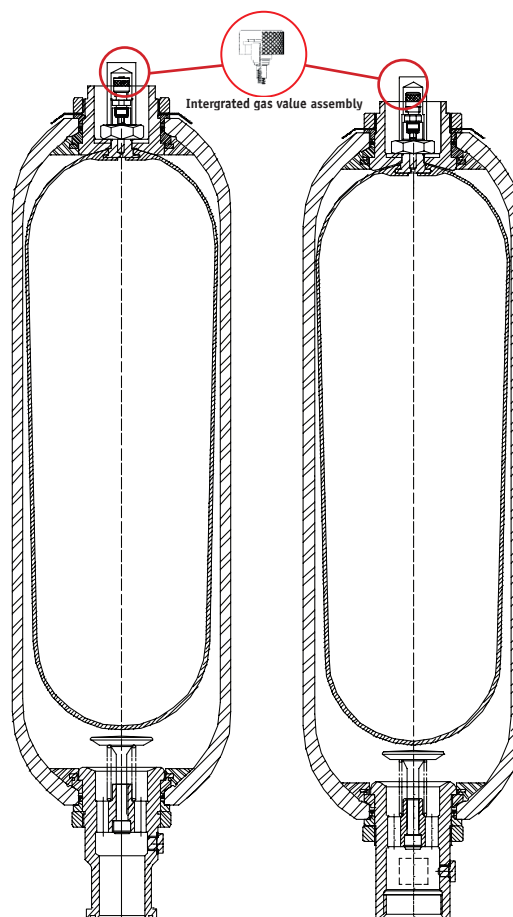

Const.00A-00 Const.00A-10

Note: 00A-10 requires an adaptor see pg19

Part Number	Volume (Litres)	Pressure (Bar)	Connection (BSPF)	Length/Diam (mm)	Weight (kg)	List Price		
						OIL	WATER	OFF-SHORE
***_**						00A-10	00A-02	33F-T2
NG10***-34A	10	345	2"	581/229	33	\$1,860.00	\$5,286.00	\$3,499.00
NG20***-34A	20	345	2"	892/229	49	\$2,249.00	\$6,072.00	\$4,042.00
NG37***-34A	37	345	2"	1413/229	77	\$3,085.00	\$8,415.00	\$5,383.00
NG50***-34A	50	345	2"	2003/229	105	\$3,748.00	\$9,587.00	\$6,106.00
NG57***-34A	57	345	2"	2581/229	125	\$3,839.00	\$10,760.00	\$6,320.00
Option SAE 00A-40						\$142.00 add-on	N/A	N/A

1 1/2" SAE 6000 PSI CODE 62

For Fittings and Safety Blocks, see page 19,20
 For Clamps and Brackets, see page 21
 For Gas Charging Equipment, see page 22