


# Transfer Barrier

## TBA SERIES

- Hi-flow fluid port with standard 2" BSPP connection
- Design, control and manufacturing in accordance with AS.1210-1FH and/or BS.7201-1989
- Increased storage capabilities for low compression ratio applications
- Standard nitrile rubber high strength bladder with 19mm (3/4") accumulator outlet stem to suit compression fittings
- Strict maintenance schedules need to be observed for trouble free operation
- Maximum compression ratio of 1.5:1 for 50 litre accumulator + 1 back up configuration
- Options for additional back-up bottles possible. Please consult OLAER

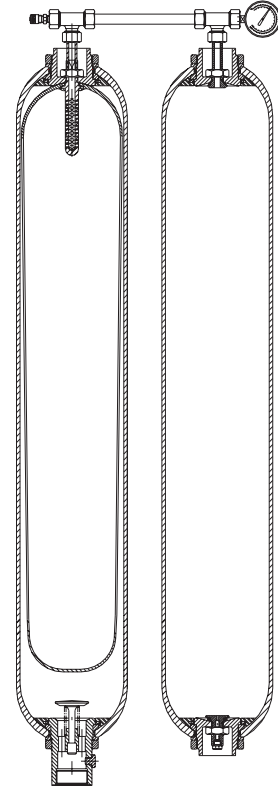

## BACK-UP TYPE ACCUMULATORS

part number	gas vol. (litres)	pressure rating (bar)	connection	length/diam. (mm)
AC5001A-00-21A	49.2	210	BSP2"	1909,Ø228
AC5001A-02-21A	49.2	210	BSP2"	1909,Ø228
NG5001A-00-34A	49.2	345	BSP2"	1909,Ø228
NG5001A-02-34A	49.2	345	BSP2"	1909,Ø228

## BACK-UP BOTTLES

part number	gas vol. (litres)	pressure rating (bar)	connection	length/diam. (mm)
AC50BB-00-21A	50	210	19mm	1909,Ø228
AC50BB-00-34A	50	345	19mm	1909,Ø228