


AIR OIL COOLER



Olaer A-LAC with A.C. motor - Technical specification


For selection of the ideal oil cooler, find out required
cooling capacity
oil flow
oil temperature
max air temperature
or use our calculation program.

A-LAC 002 - A-LAC 023

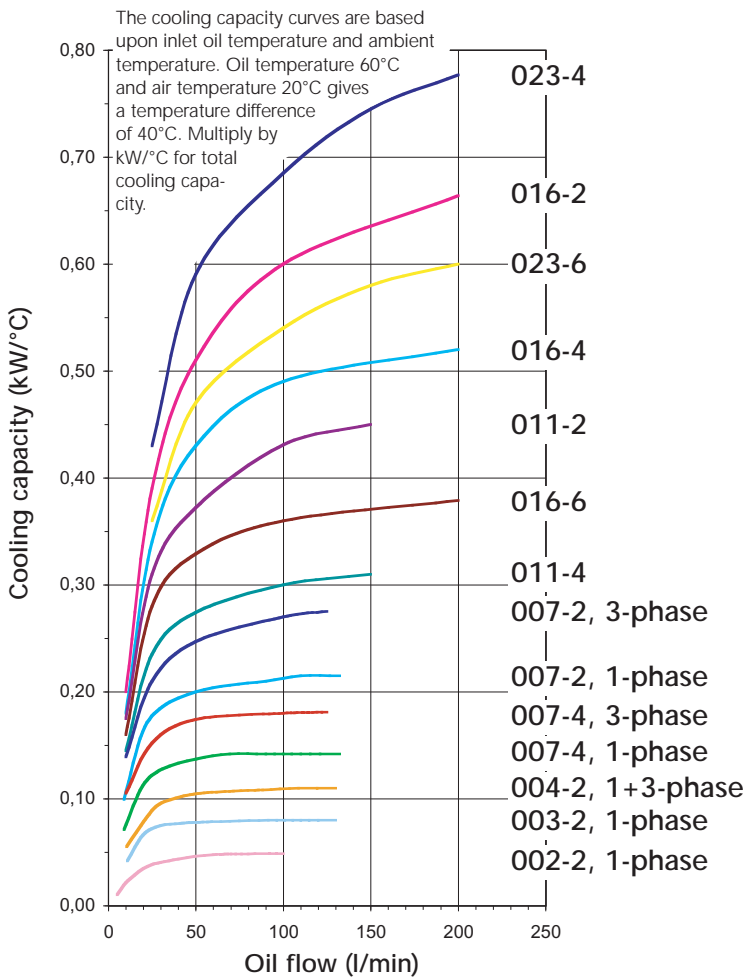

A-LAC 033 - A-LAC 112

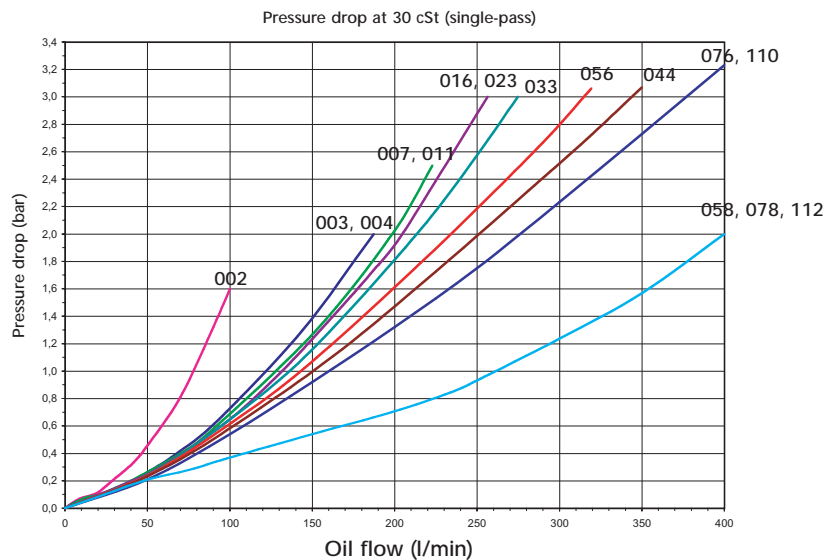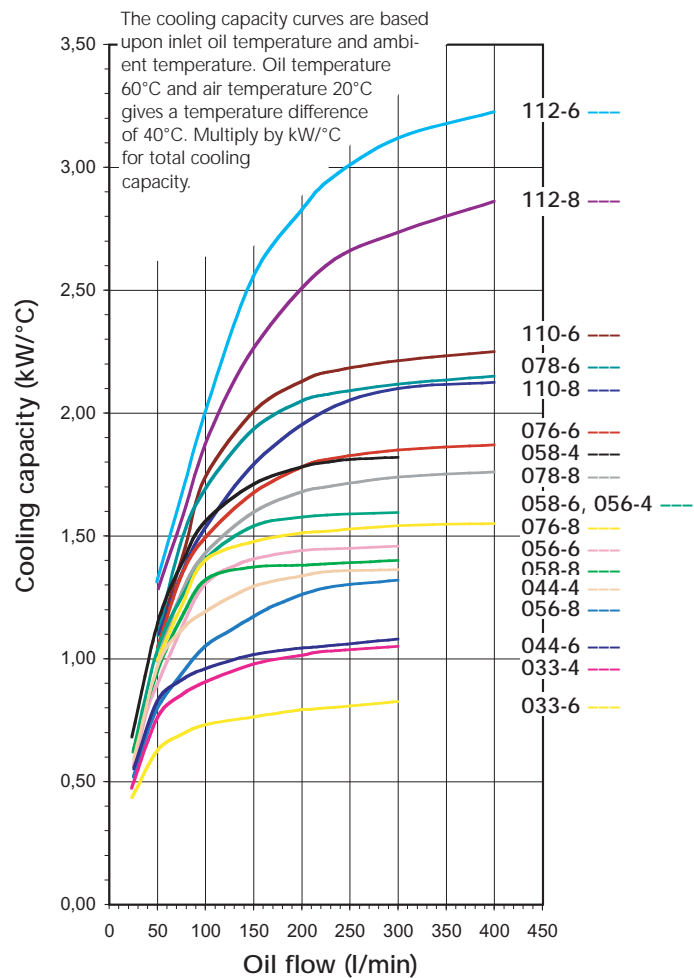

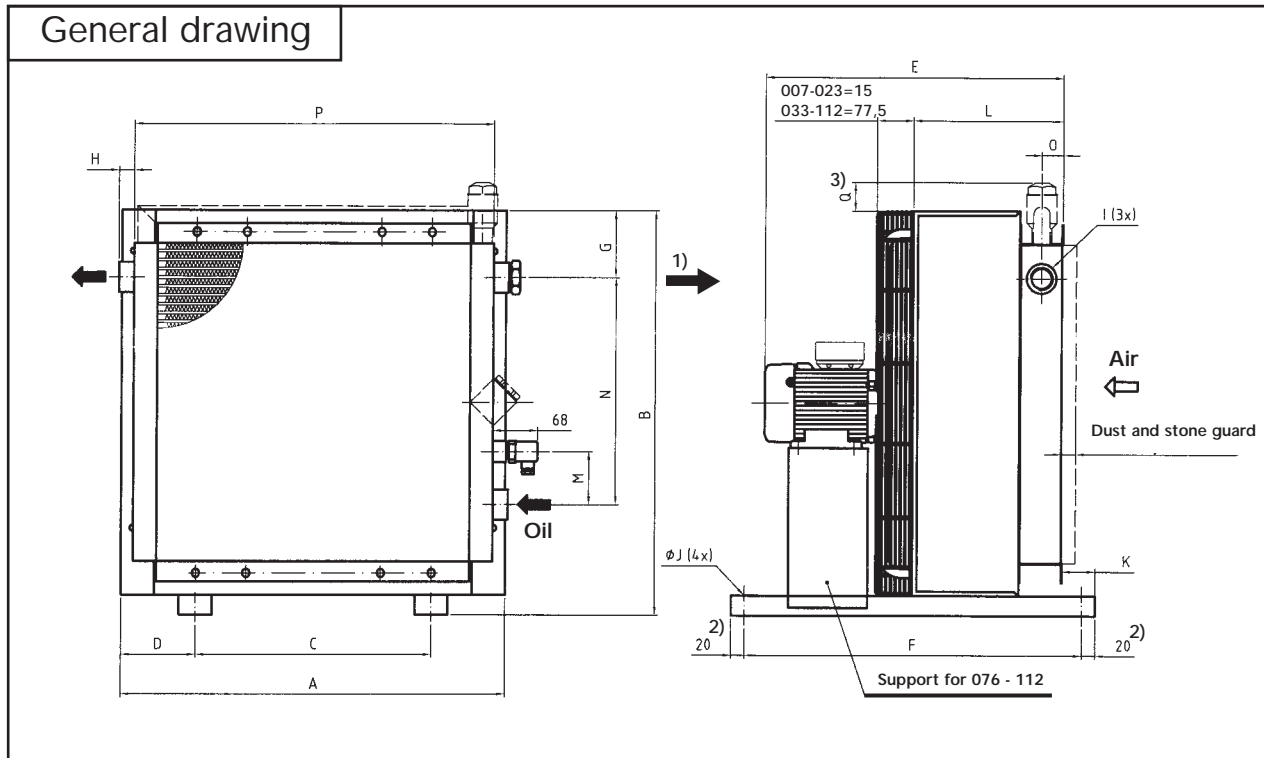

1) Oil outlet when a by-pass valve type T or a two pass is used

2) Dimension for A-LAC 002 - A-LAC 007 1phase = 10.

Dimensions

Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q ³⁾
A-LAC 002-2 1-phase	155	186	74	41	153	186	48	20	G ¹ / ₂	9	37	92	-	72	31	165	-
A-LAC 003-2 1-phase	210	223	134	38	225	145	70	23	G ¹	9	27	112	-	80	31	245	73
A-LAC 004-2 1-phase	250	259	134	58	230	145	77	23	G ¹	9	27	117	-	90	31	267	66
A-LAC 004-2 3-phase	250	259	134	58	230	145	77	23	G ¹	9	27	117	-	90	31	267	66
A-LAC 007-4 1-phase	340	343	203	69	252	267	91	23	G ¹	9	56	135	80	160	33	330	52
A-LAC 007-2 1-phase	340	343	203	69	252	267	91	23	G ¹	9	56	135	80	160	33	330	52
A-LAC 007-4 3-phase	365	395	203	81	375	510	103	23	G ¹	9	50	190	80	160	33	330	42
A-LAC 007-2 3-phase	365	395	203	81	375	510	103	23	G ¹	9	50	190	80	160	33	330	42
A-LAC 011-4 3-phase	440	470	203	119	400	510	106	23	G ¹	9	50	215	55	230	33	400	39
A-LAC 011-2 3-phase	440	470	203	119	433	510	106	23	G ¹	9	50	215	55	230	33	400	39
A-LAC 016-6 3-phase	496	526	203	147	425	510	100	23	G ¹	9	50	240	70	230	33	464	45
A-LAC 016-4 3-phase	496	526	203	147	425	510	100	23	G ¹	9	50	240	70	230	33	464	45
A-LAC 016-2 3-phase	496	526	203	147	458	510	100	23	G ¹	9	50	240	70	230	33	464	45
A-LAC 023-6 3-phase	580	610	356	112	450	510	101	23	G ¹	9	50	265	80	305	33	543	44
A-LAC 023-4 3-phase	580	610	356	112	483	510	101	23	G ¹	9	50	265	80	305	33	543	44
A-LAC 033-6 3-phase	692	722	356	168	534	510	103	25	G ¹ / ₄	9	50	240	80	406	33	635	43
A-LAC 033-4 3-phase	692	722	356	168	618	510	103	25	G ¹ / ₄	9	50	240	80	406	33	635	43
A-LAC 044-6 3-phase	692	866	356	168	559	510	87	25	G ¹ / ₄	9	50	265	80	584	33	635	59
A-LAC 044-4 3-phase	692	866	356	168	643	510	87	25	G ¹ / ₄	9	50	265	80	584	33	653	59
A-LAC 056-8 3-phase	868	898	508	180	632	510	102	25	G ¹ / ₄	9	50	290	80	584	33	802	44
A-LAC 056-6 3-phase	868	898	508	180	668	510	102	25	G ¹ / ₄	9	50	290	80	584	33	802	44
A-LAC 056-4 3-phase	868	898	508	180	668	510	102	25	G ¹ / ₄	9	50	290	80	584	33	802	44
A-LAC 058-8 3-phase	868	898	508	180	652	510	102	31	G ²	9	30	310	100	584	43	802	44
A-LAC 058-6 3-phase	868	898	508	180	688	510	102	31	G ²	9	30	310	100	584	43	802	44
A-LAC 058-4 3-phase	868	898	508	180	688	510	102	31	G ²	9	30	310	100	584	43	802	44
A-LAC 076-8 3-phase	1022	1052	518	252	693	800	101	31	G ¹ / ₂	14	70	315	100	821	33	940	45
A-LAC 076-6 3-phase	1022	1052	518	252	701	800	101	31	G ¹ / ₂	14	70	315	100	821	33	940	45
A-LAC 078-8 3-phase	1022	1052	518	252	713	800	101	31	G ²	14	50	335	100	821	43	940	45
A-LAC 078-6 3-phase	1022	1052	518	252	721	800	101	31	G ²	14	50	335	100	821	43	940	45
A-LAC 110-8 3-phase	1185	1215	600	293	785	800	100	31	G ²	14	70	340	100	985	33	1130	46
A-LAC 110-6 3-phase	1185	1215	600	293	823	800	100	31	G ²	14	70	340	100	985	33	1130	46
A-LAC 112-8 3-phase	1185	1215	600	293	805	800	100	31	G ²	14	50	360	100	985	43	1130	46
A-LAC 112-6 3-phase	1185	1215	600	293	843	800	100	31	G ²	14	50	360	100	985	43	1130	46

3) "Q" when a "by-pass valve" type S is selected.

Type	Acoustic pressure level dB(A) at 1 m*	Air flow m ³ /sec	No of poles/ Capacity kW	Weight kg
A-LAC 002-2 1-phase	50	0,06	2-0,05	4,2
A-LAC 003-2 1-phase	61	0,10	2-0,05	5
A-LAC 004-2 1-phase	63	0,15	2-0,07	6,5
A-LAC 004-2 3-phase	63	0,15	2-0,07	6,5
A-LAC 007-4 1-phase	65	0,24	4-0,08	9,5
A-LAC 007-2 1-phase	79	0,45	2-0,24	10
A-LAC 007-4 3-phase	64	0,29	4-0,25	15
A-LAC 007-2 3-phase	79	0,56	2-0,55	16
A-LAC 011-4 3-phase	69	0,61	4-0,25	20
A-LAC 011-2 3-phase	83	0,99	2-1,10	25
A-LAC 016-6 3-phase	63	0,58	6-0,18	23
A-LAC 016-4 3-phase	73	0,96	4-0,37	24
A-LAC 016-2 3-phase	86	1,45	2-1,10	27
A-LAC 023-6 3-phase	66	0,92	6-0,18	35
A-LAC 023-4 3-phase	77	1,50	4-0,75	36
A-LAC 033-6 3-phase	74	1,52	6-0,55	45
A-LAC 033-4 3-phase	84	2,41	4-2,20	52
A-LAC 044-6 3-phase	76	1,89	6-0,55	63
A-LAC 044-4 3-phase	85	2,99	4-2,20	65
A-LAC 056-8 3-phase	73	2,24	8-0,55	73
A-LAC 056-6 3-phase	81	3,08	6-1,50	75
A-LAC 056-4 3-phase	84	3,65	4-2,20	75
A-LAC 058-8 3-phase	74	2,00	8-0,55	80
A-LAC 058-6 3-phase	82	2,60	6-1,50	82
A-LAC 058-4 3-phase	85	3,20	4-2,20	82
A-LAC 076-8 3-phase	79	3,30	8-1,10	130
A-LAC 076-6 3-phase	86	4,50	6-2,20	140
A-LAC 078-8 3-phase	80	3,00	8-1,10	136
A-LAC 078-6 3-phase	87	4,10	6-2,20	146
A-LAC 110-8 3-phase	84	5,70	8-2,20	160
A-LAC 110-6 3-phase	90	7,70	6-5,50	170
A-LAC 112-8 3-phase	85	5,20	8-2,20	168
A-LAC 112-6 3-phase	91	7,00	6-5,50	178

* Noise level tolerance ± 3 dB(A)

Ordering key for Olaer A-LAC air oil cooler.
When ordering every item should be specified.

A-LAC-XXX-X-X-XX-XXX-X-X
1 2 3 4 5 6 7 8

1. Air oil cooler fitted with AC motor = A-LAC

2. Cooler size		
002	023	078
003	033	110
004	044	112
007	056	
011	058	
016	076	

3. Number of poles, motor	
Two-pole	= 2
Four-pole	= 4
Six-pole	= 6
Eight-pole	= 8

4. Voltage and frequency	
Without motor	= 0
Three phase 230/400V, 50Hz*	= A
Three phase 275/480V, 60Hz*	= B
Single phase 230V, 50/60Hz	= C
Three phase 230/400 50Hz, 275/480V 60Hz**	= D
Three phase 500V, 50Hz	= E
Three phase 400/690V, 50Hz***	= F
Motor for special voltage (specify in text en clair)	= X

5. Thermo contact	
Without thermo contact	= 00
40°C	= 40
50°C	= 50
60°C	= 60
70°C	= 70
80°C	= 80
90°C	= 90

* for A-LAC 033 to A-LAC 076/078-8.
** for A-LAC 002 to A-LAC 023.
*** for A-LAC 076/078-6 to A-LAC 112.

6. Cooler matrix	
Standard	= 000
Two pass	= T00
Built-in pressure controlled by-pass valve, single-pass	
2 bar	= S20
5 bar	= S50
8 bar	= S80
Built-in pressure controlled by-pass valve, two-pass*	
2 bar	= T20
5 bar	= T50
8 bar	= T80
Built-in temperature and pressure controlled by-pass valve, single-pass	
50°C, 2.2 bar	= S25
60°C, 2.2 bar	= S26
70°C, 2.2 bar	= S27
90°C, 2.2 bar	= S29
Built-in temperature and pressure controlled by-pass valve, two-pass*	
50°C, 2.2 bar	= T25
60°C, 2.2 bar	= T26
70°C, 2.2 bar	= T27
90°C, 2.2 bar	= T29

7. Matrix guard	
Without guard	= 0
Stone guard	= S
Dust guard	= D
Dust and stone guard	= P

8. Standard/special	
Standard	= 0
Special	= Z

* not available for A-LAC 002 - A-LAC 004.

Example: A-LAC-033-6-A-50-T20-D-0

When ordering a special cooler, specify product, components, performance, dimensions etc., in text en clair.
Price and time of delivery available on request.


For further information and latest modifications, please enter our web site www.olaer.com.au
To facilitate selection of the correct cooler, order Olaer's calculation programme.

Fluid compatibility	
Mineral oil	HL/HLP to DIN 51524
Oil/water emulsion	HFA, HFB to CETOP RP 77H
Water glycol	HFC to CETOP RP 77H
Phosphate ester	HFD-R to CETOP RP 77H

Material	
Matrix	Aluminium
Fan blades/hub	Glass fibre reinforced polypropylene/aluminium
Fan housing	Steel
Fan guard	Steel
Other parts	Steel
Surface treatment	Electrostatically powder coated

Technical specification, matrix	
Maximum static working pressure	21 bar
Dynamic working pressure	14 bar. Tested according to ISO/DIS 10771-1
Limits of heat transfer	± 6 %
Maximum oil inlet temperature	120°C.

Three-phase motor	Single-phase motor	A-LAC 004 three-phase motor
Three-phase asynchronous motor to IEC 34.1 and IEC 72 in accordance with DIN 57530/VDE 0530.		
Voltages: 50 Hz 220-240V/380-415V and 60 Hz 254-276V/440-480V or 50 Hz 380-415V/660-690V and 60 Hz 440-480V/760-830V	Nominal voltage 230V 50/60 Hz	Nominal voltage 230/400V 50/60 Hz
Insulation Class F	Insulation Class B	Insulation Class B
Rise of temperature Class B	Rise of temperature Class B	Rise of temperature Class B
Protection standard IP55	Protection standard IP 44	Protection standard IP 44

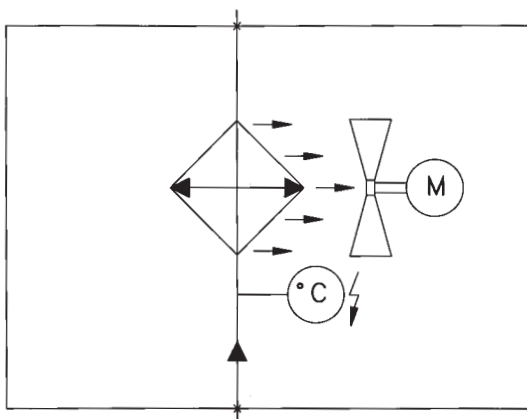

Piping diagram for Olaer A-LAC air oil cooler

Cooling capacity curves

The cooling capacity curves in this technical sheet are based upon tests according to EN 1048 and are made using oil type ISO VG 46 at 60°C.

Consult your local Olaer company for use

- with oil temperatures > 120°C
- with oil viscosity > 100 cSt
- in ambients rich in particles
- in contaminated environments
- at high altitudes

**OLAER
COOLERS**

THE COMPLETE PRODUCT RANGE



OLAER A-LAC

An air oil cooler designed for industrial applications fitted with single-phase or three-phase motor. The components have been developed in our laboratory for optimum performance.

Max. cooling capacity 130 kW at ETD 40°C.



OLAER A-LDC

An air oil cooler ideal for mobile applications because of its compact design and light weight, fitted with a 12V or a 24V DC motor. During the development of the A-LDC series of air oil coolers we developed also coolers for small cooling requirements.

Max. cooling capacity 30 kW at ETD 40°C.



OLAER A-LHC

An air oil cooler fitted with a hydraulic motor for heavy duty applications with high cooling requirement. The Olaer A-LHC air oil coolers are designed for industrial as well as mobile applications.

Max. cooling capacity 130 kW at ETD 40°C.



OLAER A-LOC

An extremely reliable air oil cooling system consisting of a matrix, a fan and a pump. Fitted with one electric motor only, this cooling system is easy to install and at a very low cost. The Olaer A-LOC cooling system is supplied fit for installation in your system.

Max. cooling capacity 45 kW at ETD 40°C.



THE OLAER GROUP AROUND THE WORLD: AUSTRALIA Olaer FCH. Tel: +61 2 9981 6888. AUSTRIA Olaer Austria GmbH. Tel: +43 7229 80306. BELGIUM S.A. Olaer Benelux. Tel: +32 2 466 15 15. CZECHIA Olaer CZ s.r.o. Tel: +42 5 47125 601-8. DENMARK Oiltech DK. Tel: +45 86 69 20 38. FINLAND Oiltech Hydraulics OY. Tel: +358 9 413 755 00. FRANCE Olaer Industries S.A. Tel: +33 1 41 19 17 00. GERMANY Olaer Industries GmbH. Tel: +49 6842 9204-0. GREAT BRITAIN FCH Ltd. Tel: +44 1244 535515. INDIA FCH India. Tel: +91 802 6533587. ITALY Olaer Italiana S.p.A. Tel: +39 011 991 85 11. KOREA Hyundai Olaer Hydraulic Co. Tel: +82 31 499 0897. NETHERLANDS Olaer Nederland B.V. Tel: +31 76 5412453. NORWAY Oiltech AS. Tel: +47 64 91 11 80. POLAND Oiltech Polska. Tel: +48 22 6738162. SCHWIZERLAND Olaer (Schweiz) AG. Tel: +41 26 492 70 00. SOUTH AFRICA FCH c/o Rolton Products CC. Tel: +27 11 474 3095. SPAIN Olaer-Oiltech Iberica SAU. Tel: +34 933 368 900. SWEDEN Oiltech AB. Tel: +46 8 636 07 00. USA Oil Air Hydraulics Inc. Tel: +1 713 937 89 00.

Please note: Being a renowned manufacturer of cooling systems for hydraulics, Olaer is constantly seeking ways to improve the specification and design of its products and alterations take place continually. The products in this brochure may be updated, altered in any way or discontinued, without prior notice.